

DESCRIPTION


The D-2000CB Cobranet Interface Module is designed for use with the D-2008SP Digital Mixing Processor Unit. When mounted to the D-2008SP, it allows audio transmission between this D-2008SP and other one. Each function is set by the dedicated setting software on a PC.

SPECIFICATIONS


Network I/F	CobraNet: 100BASE-TX, PRIMARY/SECONDARY 2 system, RJ45 connector, Enables decentralized installation, Audio transmission only Connection cable: Shielded twisted pair (STP) Cat 5 or higher LAN cable To be connected via the specified switching hub Note: This network should be completely independent of other LAN. Number of D-2008SP connection: Max. 4 Switching hub stage: Max. 7 Max extend distance: 100m (328.1 ft) (connected via a switching hub)
Input	16 channels, 20 bit/24 bit
Output	16 channels, 20 bit/24 bit
Sampling Frequency	48 kHz
Finish	Panel: Pre-coated steel plate
Dimensions	25.5 (W) × 82.5 (H) × 144 (D) mm (1" × 3.25" × 5.67") (excluding projection)
Weight	100 g (0.22 lb)
Accessory	Screw ×1

* CobraNet is a registered trademark of Cirrus Logic Corporation.


APPEARANCE



Top View

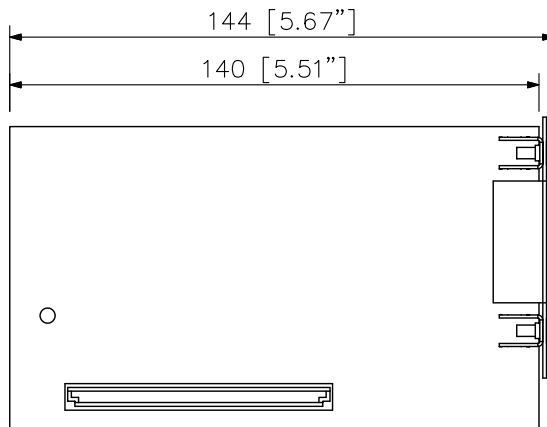

Side View

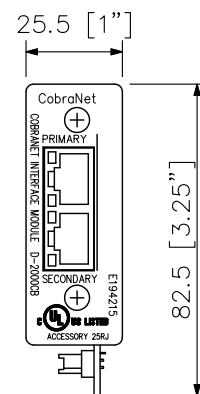

Front View

UNIT:mm SCALE:1/2